

2.4 GHz Outdoor Wireless Ethernet Radio

This robust and reliable product allows you to build non-line-of-sight, point-to-point and point-to-multipoint wireless Ethernet connections that connect “fringe” IP devices, including IP access control readers, remote printers, remote PCs, VoIP phones, point-of-sale devices, digital signage or industrial control devices.

Two versions are available: a preconfigured matched pair point-to-point Ethernet bridge – the AW2400xTR-PAIR and a single radio – the AW2400xTR, configurable as an access point or client in point-to-multipoint applications.


The 2.4 GHz band is the most globally accepted unlicensed portion of the RF spectrum. AvaLAN’s unique solution offers 29 non-overlapping channels and maximum legal power to provide five times the range of Wi-Fi through walls or line-of-sight.

The AW2400xTR is packaged in a weatherproof rugged cast aluminum enclosure that meets the IP66 Standard for water and dust resistance. It is equally at home in a factory full of machinery or atop a power pole.

The AW2400xTR radios include a built-in web browser interface for remote configuration, status monitoring and firmware update. This interface also provides a spectrum analyzer to help diagnose interference issues.

This technology is also available in an OEM module for integration into your own system. See the AvaLAN AW2400mTR-EVAL Evaluation Kit and the AW2400mTR-10 Module 10-Pak.


AvaLAN’s products offer the ideal combination of price, range, data rate, security, interference avoidance, quality-of-service, and a simple plug and play set up with minimal user programming required.

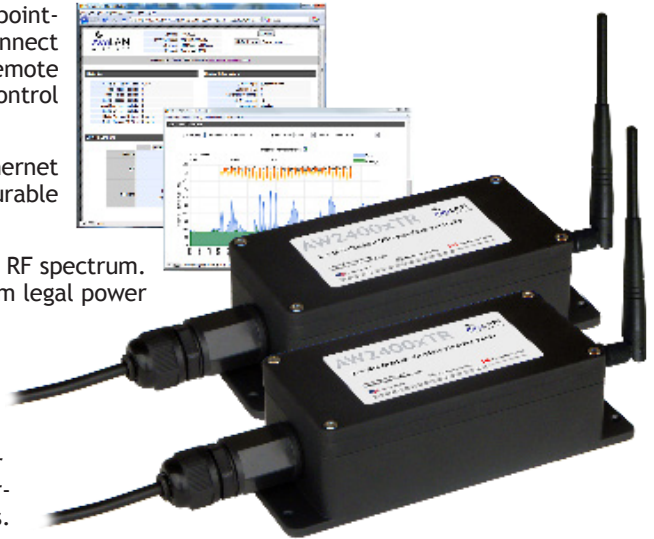

Features


- Outdoor IP66 cast aluminum enclosure for industrially hardened applications
- 29 non-overlapping channels providing unique flexibility to avoid or penetrate interference
- Five times greater range than Wi-Fi, through walls or line-of-sight
- Up to 30 mile range to connect to difficult locations
- 128 bit AES encryption, FIPS 197 - NIST Certified
- Browser interface provides easy user-programming, remote diagnostics and link analysis including a graphical RF spectrum analyzer
- Can operate up to 29 access points, each on its own non-overlapping channel with up to 16 clients per access point
- 4 Watts EIRP, Maximum legal radiated power for long range penetration
- One Watt power consumption is ready for solar applications
- -40° to +75°C for extreme temperature operation
- Power over Ethernet for easy single cable installation

Screen Captures:
Web Browser Interface

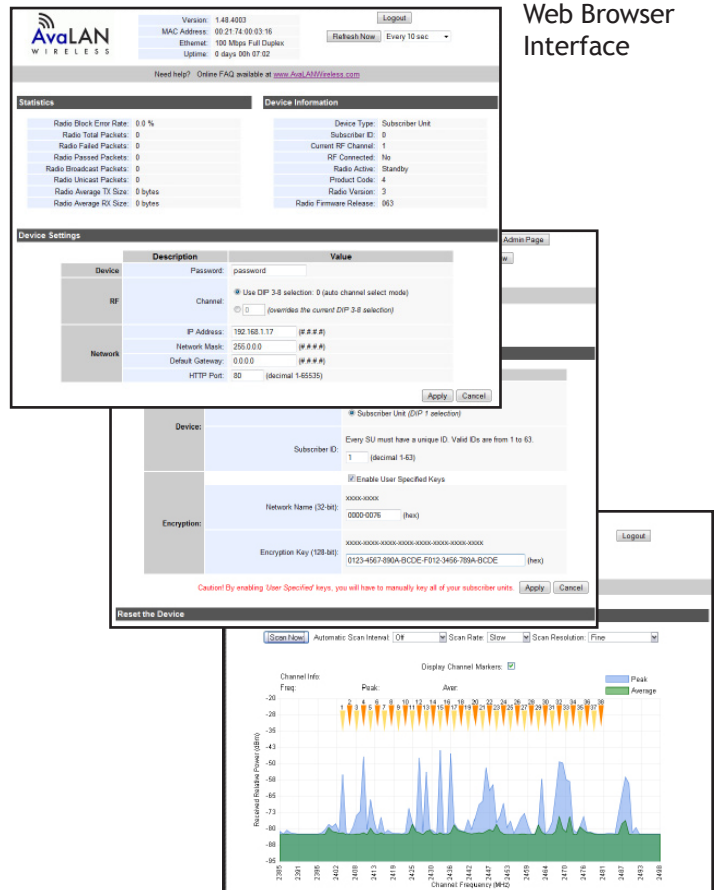

Application Example

Ultra-long-range, point-to-multipoint wireless system transmitting Ethernet data across golf course

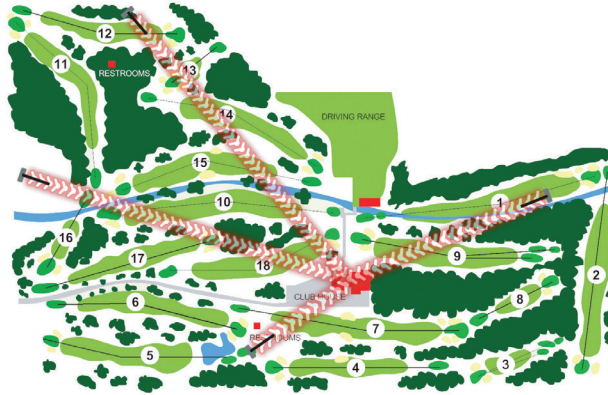

Technical specifications

Characteristic	Specification/Description
RF transmission rate	1.536 Mbps
Ethernet data rate	935 Kbps
RF Output Power	+15 dBm (4 Watts EIRP with 21 dBi antenna)
Receiver Sensitivity	-87 dBm at 10 ⁻⁴ Bit Error Rate
Range	Up to 40 miles line-of-sight with 21 dBi antennas
RF channels/bandwidth	29 non-overlapping with 2.0833 MHz spacing and 1.75 MHz bandwidth, automatic or manually selectable via web browser interface
Connector types	RF: RPTNC Female / 10/100 base T Ethernet: RJ-45
Data Encryption	128-bit AES, FIPS197, keys set through password-protected browser interface
Error correction technique	Sub-block error detection and retransmission
Adjacent band rejection	SAW receiver filter attenuates cellular and pager interference
Power regulation	Built-in switching regulator
Browser management tools	QoS Statistics, Network Settings, Spectrum Analyzer, Firmware Upgrade
Power consumption	Transmit: 1.7 Watts Receive: 0.8 Watts
Voltage	9 to 48 VDC via unused pins in RJ-45 jack - pins 4,5 positive, 7,8 ground
Power regulation	Switching regulator
Transmit current draw	140 ma at 12 VDC
Operating Temperature Range	-40 °C to +75 °C
Operating Humidity Range	0% - 95% (non-condensing)
Enclosure	Die cast aluminum, powder-coated, gasket-sealed connectors and cover. Meets IP66 for water and dust resistance.
Size	6 by 8 by 20 cm, 0.8 Kg, connectors included Mounting holes on bottom flange, 52 by 190 mm, 4 mm dia.

Ordering Information

AW2400xTR

2.4 GHz Outdoor Wireless Ethernet Radio

Contents:

- (1) AW2400xTR Radio
- (1) AW2-2400 Omnidirectional Antenna
- (1) AW-POE Power Over Ethernet Injector
- (1) 110 VAC to 12 VDC power adapter

AW2400xTR-PAIR

2.4 GHz Outdoor Wireless Ethernet Bridge

Contents:

- (2) AW2400xTR Radios
- (2) AW2-2400 Omnidirectional Antennas
- (2) AW-POE Power Over Ethernet Injectors
- (2) 110 VAC to 12 VDC power adapters

©2004 – 2010 AvaLAN Wireless Systems Incorporated. All rights reserved. AvaLAN Wireless and the AvaLAN Wireless logo are registered trademarks of AvaLAN Wireless Systems Incorporated. All other trademarks are property of their respective owners. AvaLAN Wireless makes no representations or warranties with respect to the accuracy, utility, or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, express or implied, by estoppel or otherwise, to any patents or other intellectual property rights is granted by this document. Particular uses or applications may invalidate some of the specifications and/or product descriptions contained herein. The customer is urged to perform its own engineering review before deciding on a particular application. AvaLAN Wireless products are not designed for use in medical, life saving, or life sustaining applications.